ECMS User Workflow Guide

Every screen, every field, with the exact value to type

Engineering Consultancy Management System (Kashif)
Version 1.0 · October 2026

How to read this guide

- Each stage is one screen. Do the stages in order the first time.
- Every field has a meaning, whether it is required (*), and an example value.
- One running story is used throughout, so the example in one stage feeds the next.
- Green boxes show the state after you save. Orange boxes are traps.

Contents

1. Before you start (roles, conventions, the example story)
2. Setup before onboarding: Users, Wilayats, Sketch types, Planning templates, Required documents
3. Client and contacts
4. Property
5. Proposal: create, status moves, convert
6. Project: create, edit, team, activate
7. Planning: activities, milestones, submissions
8. Supervision: agreement, site visit, observation, instruction
9. Drawings, documents, issues, modifications
10. Complete and close a project
11. Admin tools after go-live (data management)
12. Reference: who can do what, statuses, "Why can't I...?"

1. Before you start

1.1 Conventions on every form

You see	Meaning
Red * after a label	Required. The form will not save without it.
Blank "Reference" / "Project code"	Leave it blank to get an automatic number (for example `CL-2026-001`). Only type one if you must match an existing number.
Date boxes `DD` `MM` `YYYY`	Type the three parts, or use the calendar button. Example: `01` `12` `2026`.
"Or calculate target end date from a duration"	Type a number and pick Days / Months / Years. The end date is filled for you from the start date.
Search box ("Type to search...")	Type part of a name, reference, CR/Civil ID or phone, then click the result.
Status buttons (Activate, Approve...)	Only moves that are legal from the current status are shown, and only if your role allows it. You cannot type a status.
"Someone else changed this record. Reload and try again."	Two people edited the same record. Reload the page and repeat your change.
Archive	Hides a record but keeps history. Nothing is deleted from the normal screens.

1.2 Roles

Role	Typical person	Main abilities
System Administrator	IT / office admin	Everything, including users, setup lists, data management.
Management / Director	Directors	View everything. Approve submissions and drawings. Override a completion gate with a written reason. Override a duplicate warning. Cannot edit.
Project Manager	Project managers	Create clients, properties, proposals (including convert) and projects; manage the project team; close projects. Maintain Wilayats, Sketch types and Planning templates.
Planning Team	Architects / planners	Proposals, planning work, drawings. Can approve submissions (not their own).
Supervision Team	Site engineers	Site visits, issues, supervision work.
Document Controller	Document staff	Upload, edit and archive project documents. Maintain the Required documents list.
Client / External Stakeholder	Reserved	Has no permissions yet. Do not assign.

A user's role says *what kind of work* they do. *Where* they can do it comes from project membership: a Project Manager, Planning, Supervision or Document Controller user only sees projects they have been added to.

1.3 The example story used in this guide

> **Mr Salim Hamad Said Al Balushi** wants a two-storey villa on **Plot 102/8, Al Khoud, Seeb**. His son **Khalid** is the contact. We win the proposal, convert it to a project named **Salim Hamad Said Al**

> **Balushi – Plot 102/8 – Al Khoud, Seeb** (planning and supervision), submit to **Muscat Municipality**, get a permit, supervise construction, then hand over and close.

Staff in the story: `admin` (System Administrator), `fatima.alharthy` (Planning Team, assigned architect), `omar.saidi` (Project Manager), `yusuf.rashdi` (Supervision Team, site engineer), `huda.kindi` (Planning Team, second approver), `director1` (Director).


2. Setup before onboarding (one time)

Do this once, before the first client is entered. The later stages draw on these lists. Every Setup screen is in the left menu under **Setup**; you only see the entries your role may open.

Order	Screen	Who can open it	Why it comes first
1	Users	System Administrator	Everyone else needs an account and a role.
2	Wilayats	System Administrator, Project Manager	Property form pick list. Comes pre-loaded with Oman's wilayats.
3	Sketch types	System Administrator, Project Manager	Proposal form "Type of sketch".
4	Planning templates	System Administrator, Project Manager	Standard activities / milestones on the planning page.
5	Required documents	System Administrator, Document Controller	Drives the document checklist that blocks Close.

2.1 Users `/users/new`

What it is. One account per person. They can sign in as soon as you save. Tell them the password by a route other than email (the system sends no mail).

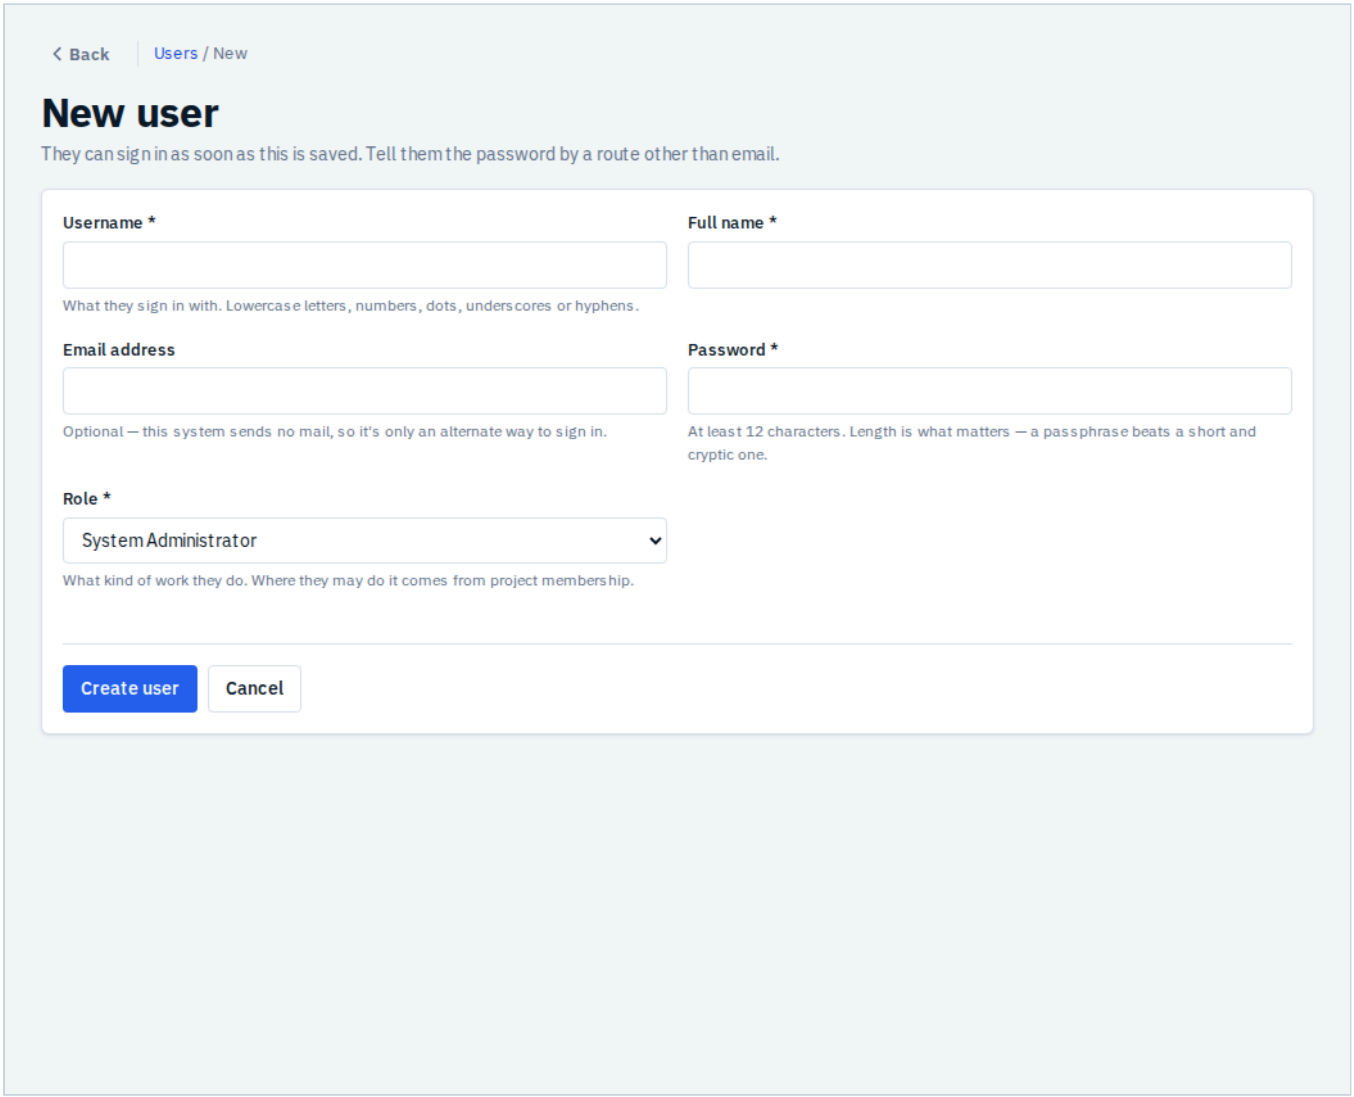

The New user screen

Field	Req.	Meaning and rules	Example


Username	*	What they sign in with. Lowercase letters, numbers, dots, underscores or hyphens. 3 to 50 characters. Cannot be changed later.	`fatima.alharthy`
Full name	*	Shown on records, approvals and the audit trail. Up to 200 characters.	`Fatima Al Harthy`
Email address		Optional. Only an alternate way to sign in, since no email is ever sent. Cannot be changed later.	`fatima@example.com`
Password	*	At least 12 characters. Length matters more than symbols, so a passphrase is fine.	`blue-camel-river-42`
Role	*	What kind of work they do (see section 1.2). One role at creation; add more on the user page with "Grant role".	Planning Team

After save: the user page opens. The account is Active. Create the six story users now.

Traps. A user with no role can sign in but can do nothing. Disable (do not delete) people who leave; their history is kept. You cannot disable your own account. Setting a new password ends all of that person's sessions.

2.2 Wilayats `/wilayats`

What it is. The list of wilayats offered on the property form. Picking from it keeps spelling identical everywhere, which makes searching and duplicate detection (plot number plus wilayat) reliable.

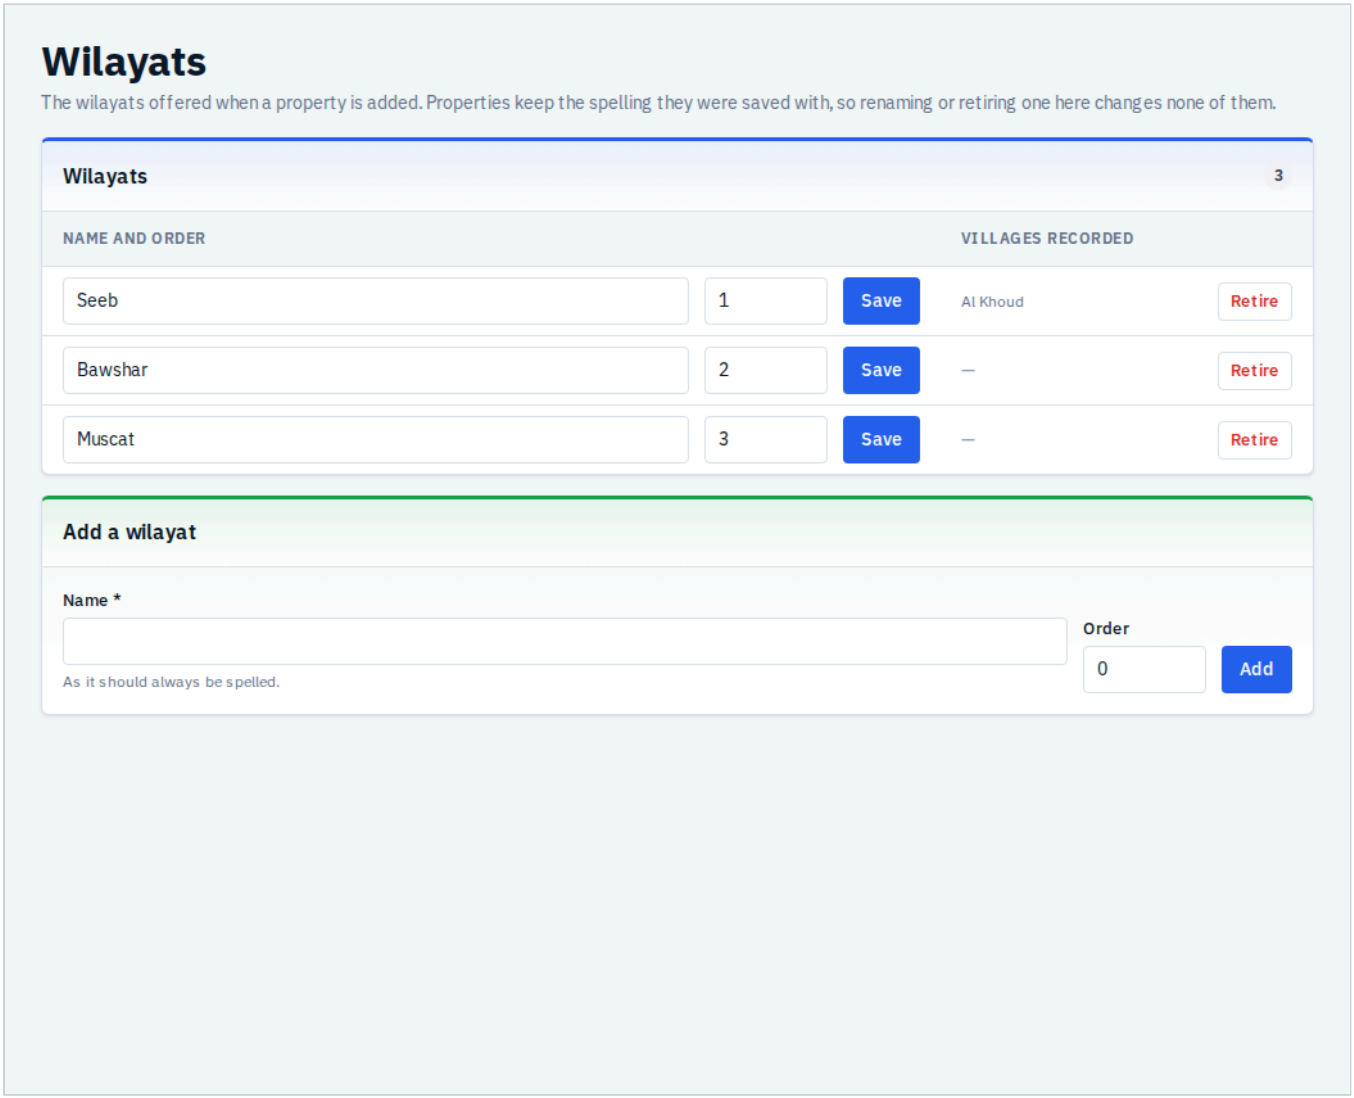

The Wilayats screen. The Villages recorded column fills in as properties are saved; you never type villages here.


Field	Req.	Meaning and rules	Example
Name	*	The wilayat exactly as it should always be spelled. Unique. Up to 100 characters.	`Seeb`
Order		Position in the drop-down. Lower comes first.	`1`

A new system comes **pre-loaded with 62 wilayats** across all governorates (Muscat, Muttrah, Bawshar, Seeb, Al Amerat, Quriyat, Salalah, Sohar, Nizwa, Sur and so on). For the story nothing needs adding: `Seeb` is already there. Add a name only if one is missing, or if your office spells one differently. Edit changes Name or Order; Retire hides it from new forms but properties that already use it are unaffected.

> **Trap.** The pre-loaded spellings are only a starting point (for example `Seeb`, `Quriyat`). Check them against the spelling your office uses and rename before properties are entered, because properties keep the spelling they were saved with. A wilayat that is not on the list can still be typed on the property form, but it saves as typed and the form says "Ask an administrator to add it under Setup → Wilayats." Villages need no setup: they are suggested from villages already recorded under that wilayat.

2.3 Sketch types `/sketch-types`

What it is. The kinds of sketch a client can ask for. Staff choose one in "Type of sketch" on a proposal. Ten are pre-loaded: Villa GF only, Villa G+1, Villa G+1 with penthouse, Twin villa, Farm house, Extension, Industrial, Residential-commercial, Plot division, Krookie division.

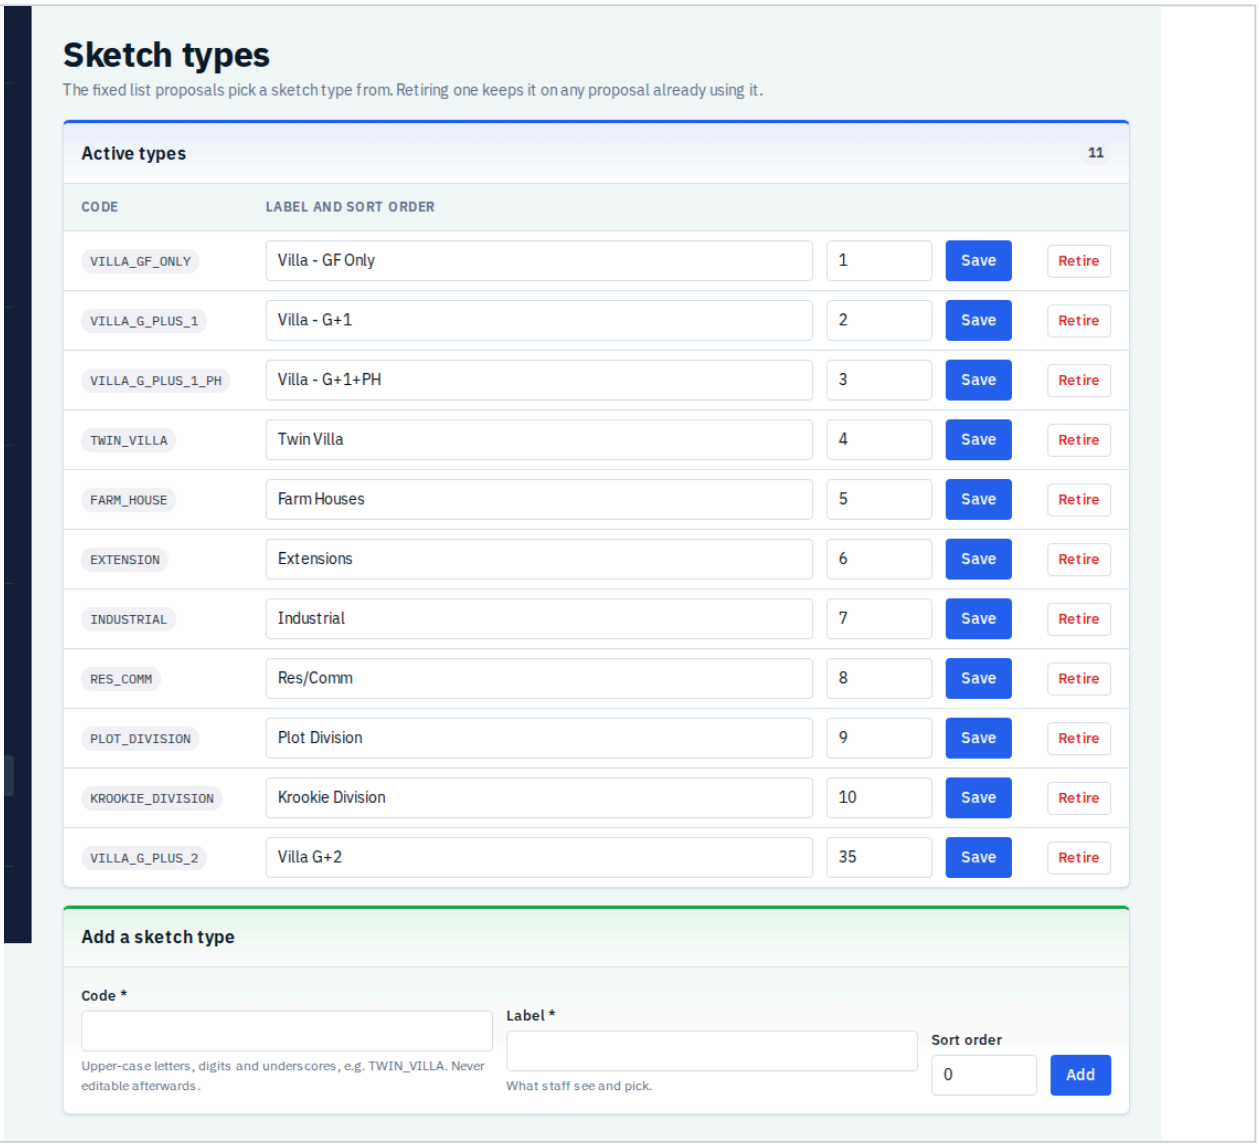


The Sketch types screen

Field	Req.	Meaning and rules	Example
Code	*	Internal key. Upper-case letters, digits and underscores only. Up to 50 characters. **Never editable afterwards.**	`VILLA_G_PLUS_2`
Label	*	What staff see and pick. Editable later.	`Villa G+2`
Sort order		Position in the drop-down.	`35`

> **Trap.** Retiring a type removes it from new proposals but existing proposals keep it, shown as "(retired — kept for this proposal)".

2.4 Planning templates `/planning-templates`

What it is. Ready-made activity and milestone names. On a project's planning page, "Add standard activities" and "Add standard milestones" show these as tick lists, so staff do not retype them. Pre-loaded: 10 activities (Site survey, Soil test coordination, Concept layout, Client presentation, Architectural drawings, Structural design, MEP design, BOQ preparation, Municipality submission pack, Final drawing set) and 5 milestones (Concept approved, Client approval, Authority submission, Permit received, Planning complete).

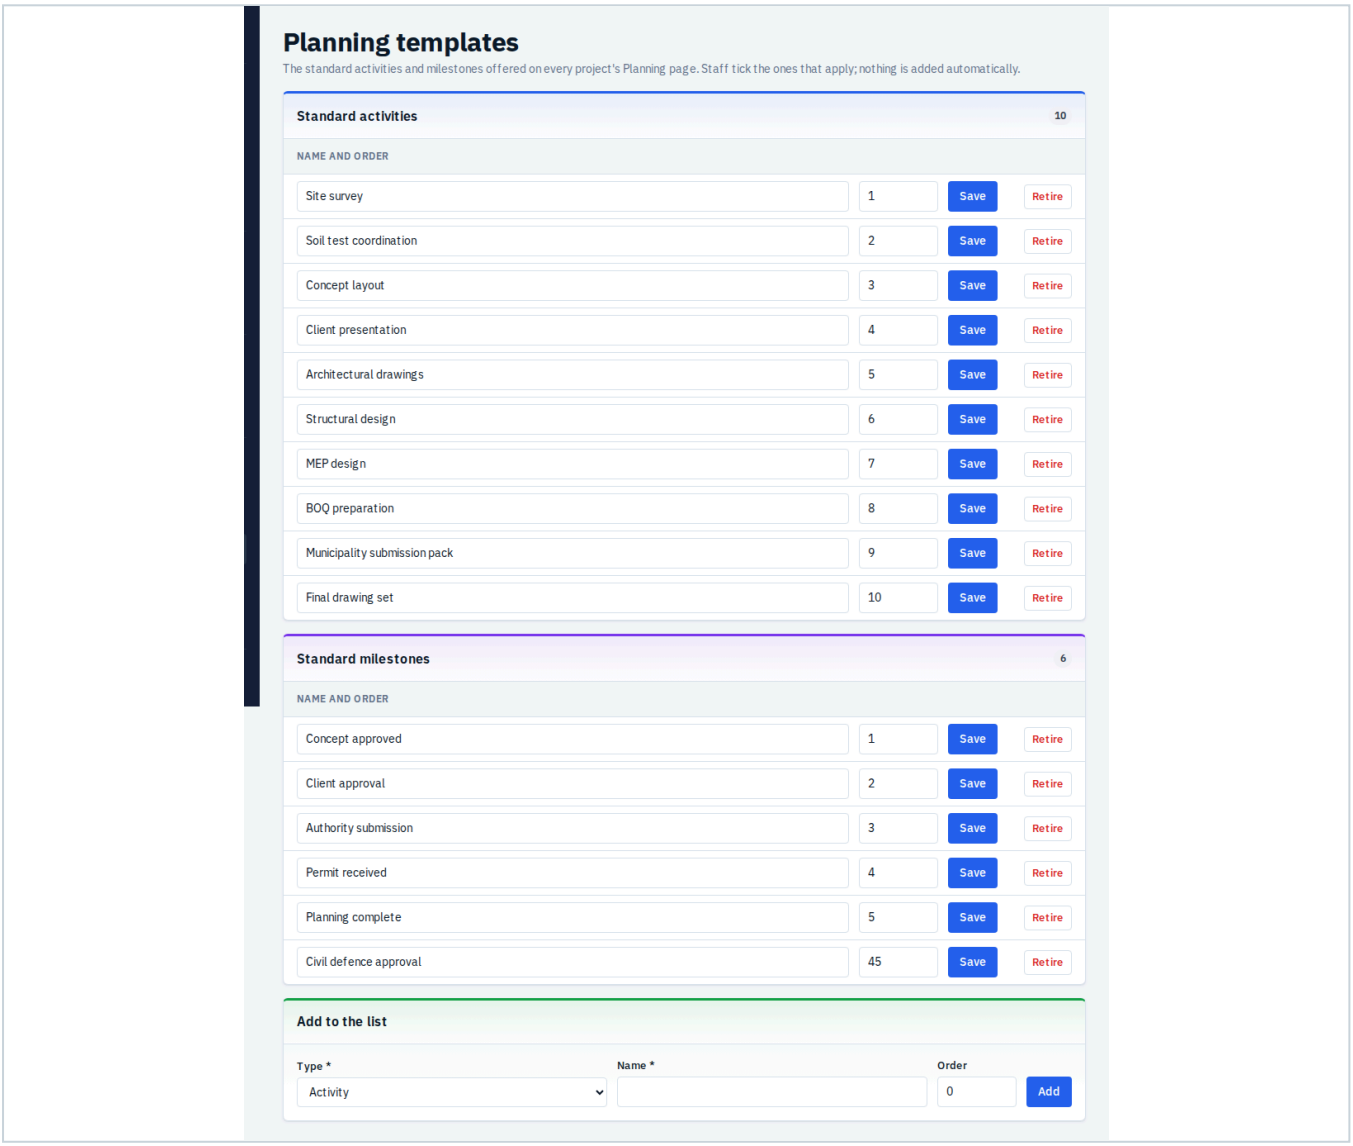

The Planning templates screen


Field	Req.	Meaning and rules	Example

Type	*	Activity (a task) or Milestone (a checkpoint). Cannot be changed afterwards.	Milestone
Name	*	Up to 200 characters. Unique within its type.	`Civil defence approval`
Order		Position in the tick list.	`45`

Templates are only suggestions. Changing or retiring one never changes projects that already used it.

2.5 Required documents `/required-documents`

What it is. The checklist of document categories a project must have. The Documents page shows a tick or cross per row, and a project **cannot be closed** while a required category is missing. Pre-loaded, all "Any project": Design, Tests, Authority, Contract, Construction, Completion.

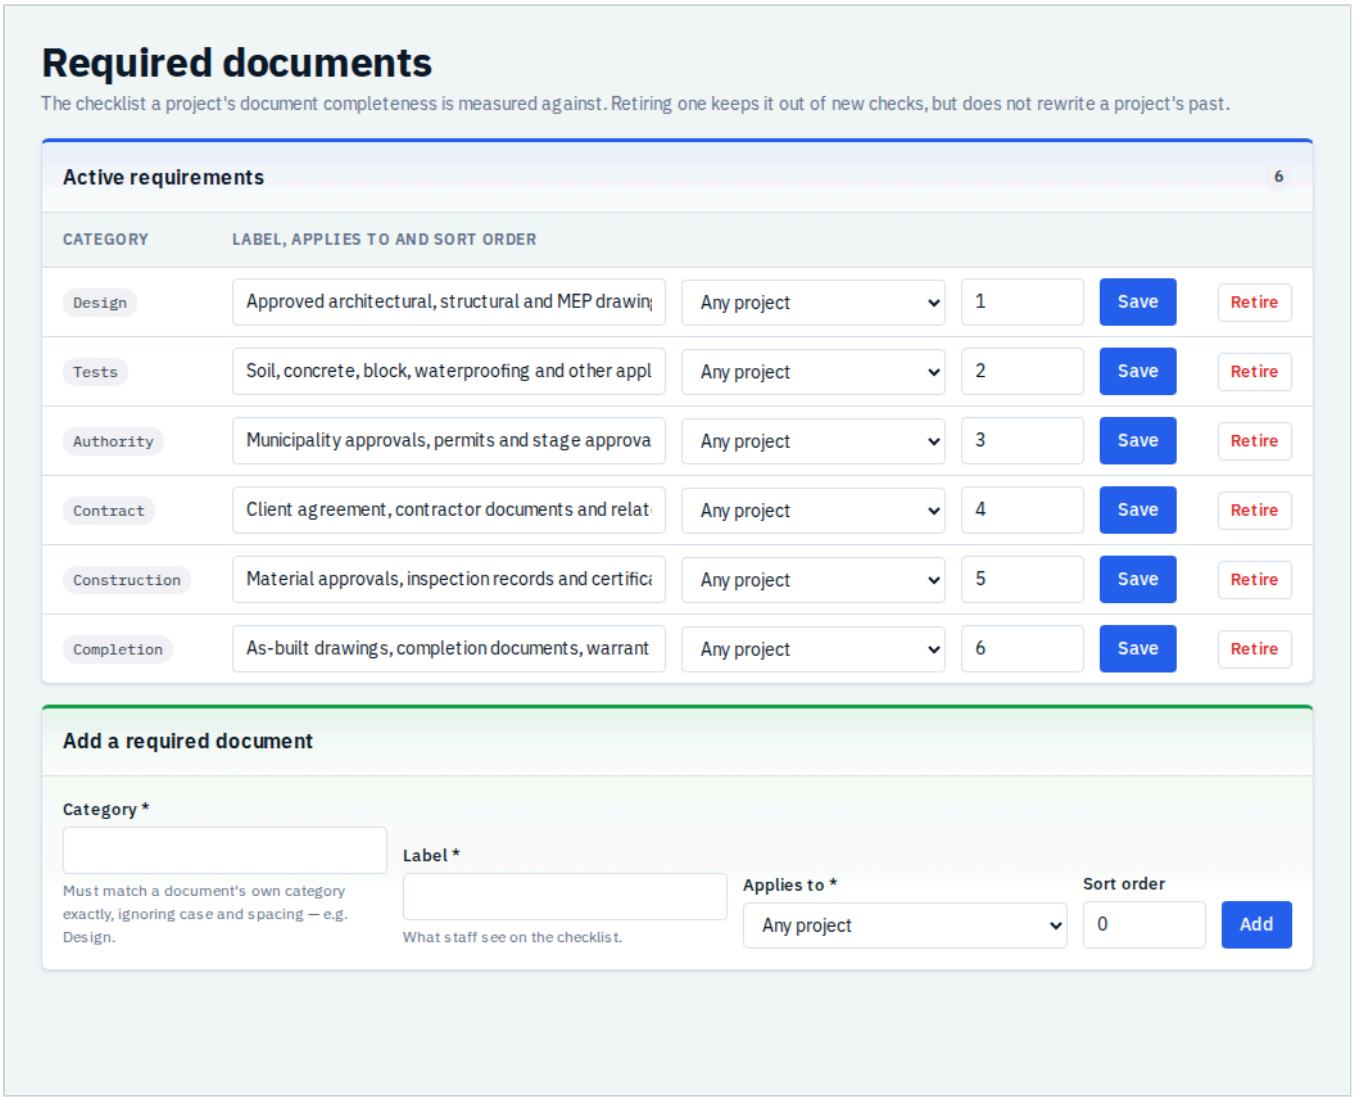

The Required documents screen. Edit a row and press Save, or press Retire.


Field	Req.	Meaning and rules	Example
Category	*	Must match the Category typed or picked when someone uploads a document, ignoring capitals and spaces. Cannot be changed afterwards.	`Design`
Label	*	What staff see on the checklist. Up to 200 characters.	`Design drawings`
Applies to		Planning, Supervision, or Any project. A Supervision row applies only to projects that run supervision.	Any project

Sort order		Position on the checklist.	`10`

> **Trap.** A category spelled `Designs` will not satisfy `Design`. Staff should pick from the drop-down on upload rather than typing. Retire a row to stop requiring it.

3. Client and contacts `/clients/new`

What it is. The person or company we work for. A client owns properties, proposals and projects. Needs `client:create` (System Administrator, Project Manager).

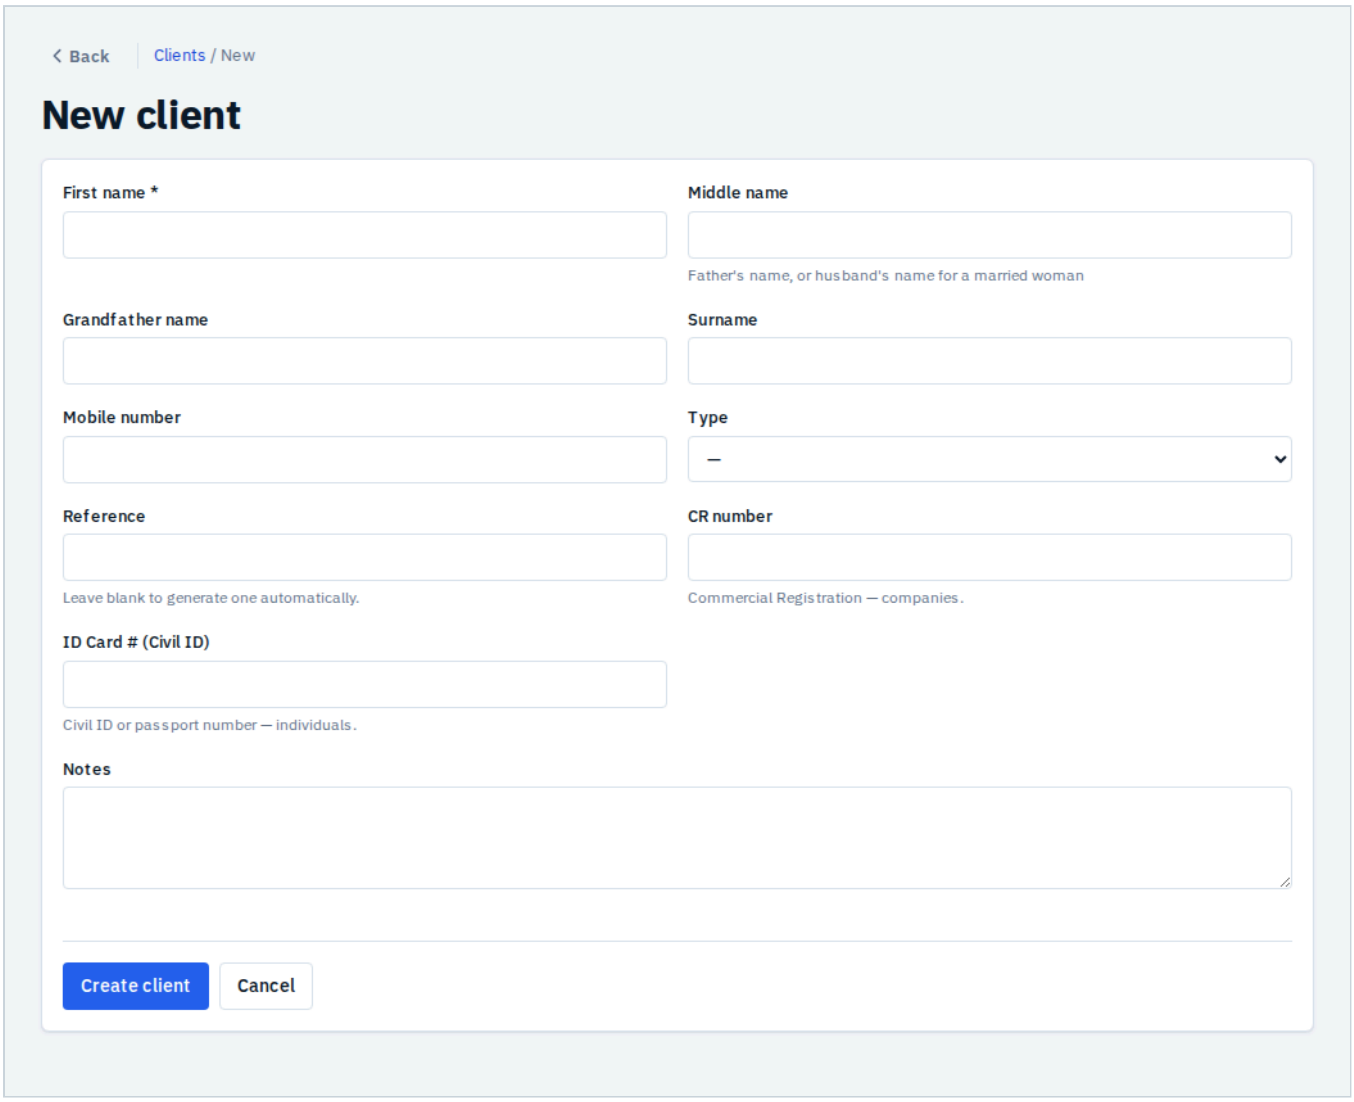

The New client screen

Field	Req.	Meaning and rules	Example
First name	*	For a person, their first name. **For a company, type the registered name here** and leave the other name parts blank. Up to 100 characters.	`Salim`
Middle name		Father's name (or husband's name for a married woman).	`Hamad`
Grandfather name		Third name part.	`Said`
Surname		Family or tribe name. The full name shown everywhere is the four parts joined.	`Al Balushi`
Mobile number		Digits with optional +, at least 8 digits. Used to find duplicates.	`+96891234567`
Type		Individual or Company.	Individual
Reference		Leave blank for an automatic number. Unique among live clients.	(blank) → `CL-2026-001`
CR number		Commercial Registration, for companies.	(blank for Salim)

ID Card # (Civil ID)		Civil ID or passport number, for individuals.	`12345678`
Notes		Free text, up to 5000 characters.	`Prefers WhatsApp contact`

3.1 Duplicate warning

On Save the system looks for the same CR number or Civil ID (a hard stop) or a similar name or the same phone (a warning only). If it finds a match you may open the existing client instead. Only a Director or System Administrator can override a hard stop, and they must give a reason of at least 5 characters, which is stored in the audit trail.


3.2 Contacts (add on the client page)

Field	Req.	Meaning and rules	Example
Name	*	Unique within this client.	`Khalid Salim Al Balushi`
Position		Relationship or job title.	`Son`
Designation, Place of work		Optional extra details.	`Engineer, PDO`
ID number		Unique across all contacts.	`87654321`
Email, Phone		Contact details.	`+96899887766`
Primary		Tick for the main contact. Only one per client.	Ticked

> **After save:** client `CL-2026-001` exists. A client cannot be archived while it still has live properties or any project.

4. Property `/properties/new`

What it is. The plot. Each property belongs to one client for good. Needs `property:create`. You can also arrive here from a proposal with "Add new property"; the form is then pre-filled and you return to the proposal on save.

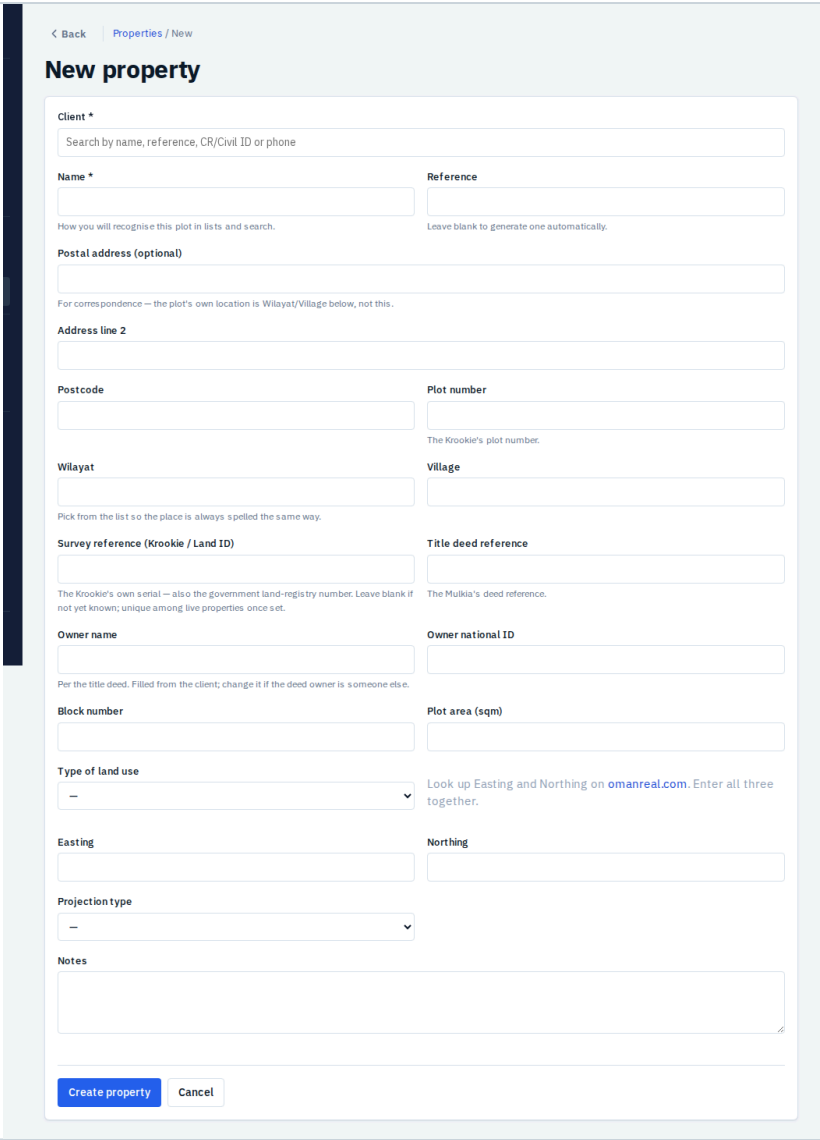

The New property screen


Field	Req.	Meaning and rules	Example
Client	*	Search by name, reference, CR/Civil ID or phone. Cannot be changed later.	`Salim Hamad Said Al Balushi`
Name	*	How you will recognise the plot in lists. Click the "Suggestion" link to use "Plot {no} – {village}, {wilayat}".	`Plot 102/8 — Al Khoud, Seeb`
Reference		Blank for automatic.	(blank) → `PR-2026-001`
Postal address, Address line 2, Postcode		The mailing address only. The plot's own location is Wilayat and Village below.	`PO Box 123`, `PC 111`
Plot number		The Krookie's plot number. With Wilayat it is used for duplicate detection.	`102/8`
Wilayat		Pick from the list (set up in 2.2).	`Seeb`
Village		Type or pick from suggestions already used in that wilayat.	`Al Khoud`
Survey reference (Krookie / Land ID)		The Krookie's serial, also the land-registry number. Unique among live properties; dashes and spaces are ignored when comparing. **No override.** Needed before a proposal can convert.	`KR-2026-004417`

Title deed reference		The Mulkia deed number.	`MK-77412`
Owner name, Owner national ID		Per the title deed. Filled from the client; change if the deed owner is someone else.	`Salim Hamad Said Al Balushi`, `12345678`
Block number		Block as on the deed.	`5`
Plot area (sqm)		Positive number. Use the deed's figure.	`600`
Type of land use		Residential, Commercial, Agricultural, Industrial, Mixed use, Government.	Residential
Easting, Northing, Projection type		Look up on omanreal.com. **All three together or none.** The point must fall inside Oman. Projections: Clarke 1880 Zone 39 or 40, UTM Zone 39N or 40N.	`625400`, `2590100`, UTM Zone 40N
Notes		Free text.	`Corner plot`

> **After save:** property `PR-2026-001` is live and linked to the client. If a same-plot, same-wilayat property exists, you get an exact-match warning that only a Director or System Administrator can override.

5. Proposal /proposals/new

What it is. The enquiry stage, before there is a project. A sketch number is created the moment you save. A client or property is not required to start. Needs `proposal:create` (Planning Team, Project Manager, System Administrator).

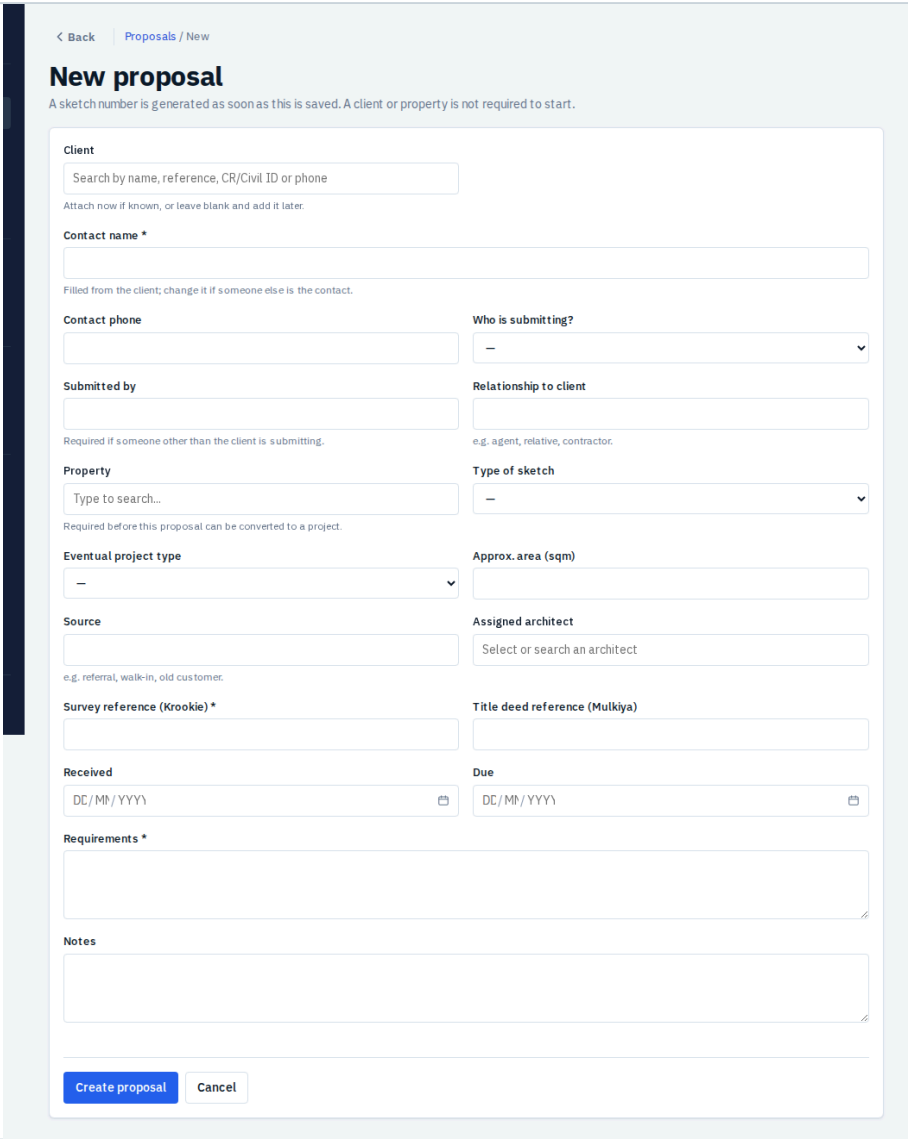

The New proposal screen

5.1 Create

Field	Req.	Meaning and rules	Example
Client		Attach now if known. Choosing one fills Contact name and phone.	`Salim Hamad Said Al Balushi`
Contact picker		Choose a saved contact of that client.	`Khalid Salim Al Balushi`
Contact name	*	Who we speak to.	`Khalid Salim Al Balushi`
Contact phone		8+ digits.	`+96899887766`
Who is submitting?		Self (client deals with us) or Other (someone submits on their behalf).	Self
Submitted by, Relationship to client		Needed only when Other, for example agent, relative, contractor.	(blank for Self)

Property		Must belong to the same client and not be archived. Required before convert.	`Plot 102/8 — Al Khoud, Seeb`
Type of sketch		From the Sketch types list (2.3).	Villa G+1
Eventual project type		Planning, Supervision, or Planning and supervision. Decides which workstreams the project opens with.	Planning and supervision
Approx. area (sqm)		Rough size; copied to the property form later.	`600`
Source		How the enquiry arrived.	`Referral`
Assigned architect		A Planning or Project Manager user.	Fatima Al Harthy
Survey reference (Krookie)	*	The Krookie serial. Required to create, and again to convert.	`KR-2026-004417`
Title deed reference (Mulkiya)		Optional; not checked at convert.	`MK-77412`
Received, Due		Dates. A Due date in the past shows an "Overdue" badge. Due becomes the project's target end date on convert.	`01/11/2026`, `30/11/2026`
Requirements	*	The client's brief in plain words. Copied to the project description on convert.	`G+1 villa, 5 bedrooms, majlis, maid room, 2-car garage`
Notes		Internal notes.	`Client wants a modern facade`

> **After save:** status **New**, sketch number `26-SB-001`.

5.2 Move it forward

Button	From → To	When to use
Move to concept	New → Concept (also On hold → Concept, shown as Resume)	Design work started.
Send for client review	Concept → Client revision	Sketch shown to the client.
Approve	Client revision → Approved	Client accepts the sketch.
Mark won	Approved → Won	Client signs and wants to proceed.
Put on hold	New, Concept, Client revision → On hold	Client paused.
Mark lost	Any open status → Lost (final)	Client declined. Cannot be undone.

5.3 Convert to a project

Only a **Won** proposal can convert, by someone with `proposal:convert` (Project Manager, System Administrator). The "Ready to convert" card lists four checks. A form below it offers only the missing ones.


Check	How to satisfy it
Client attached	Search one, or "Add new client".
Property attached	Search one, or "Add new property" (needs the client first).
Survey reference (Krookie)	Type it, for example `KR-2026-004417`.
Requirements	Type the brief.

Press **Convert to project**. In one step the system creates a numbered project (`26.P.001` in our story, named "{client full name} – {property name}", here `Salim Hamad Said Al Balushi — Plot 102/8 — Al Khoud, Seeb`; you can rename it with Edit), adds you as Project Manager, opens the right workstreams, copies the requirements into the description and the due date into the target end date, and marks the proposal **Converted**.

> **After convert:** project status **Draft**. Proposal status **Converted** and read-only.

6. Project `/projects/new or from convert`

Normally a project comes from a converted proposal. You can also create one directly (needs `project:create`). The creator is added automatically as a team member.

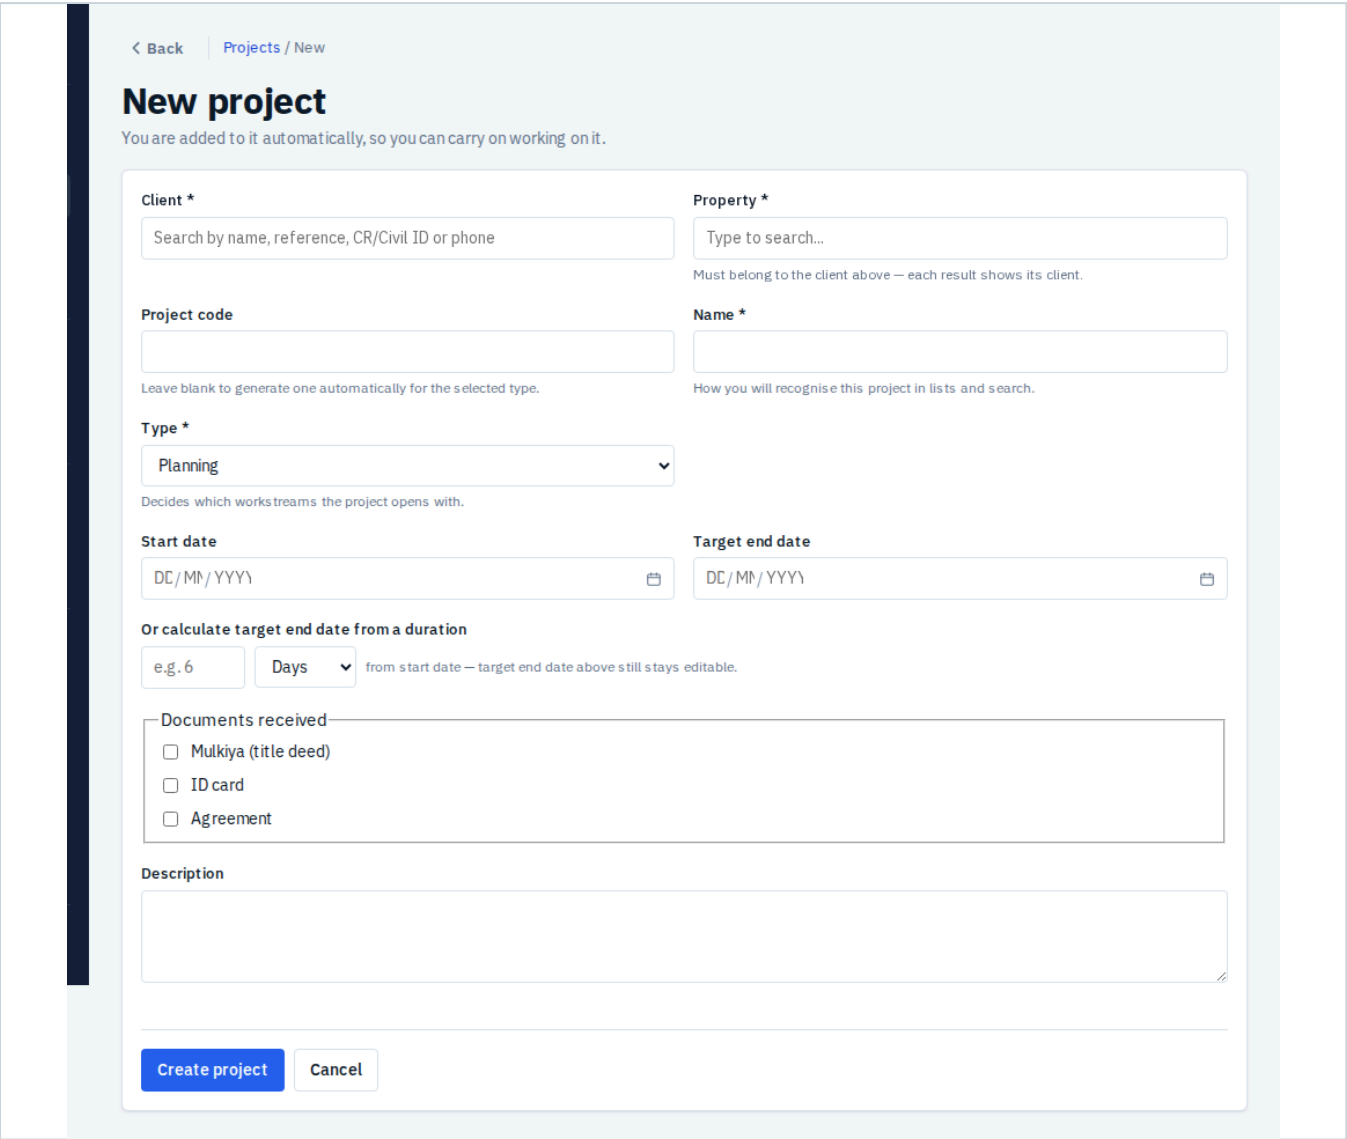

The New project screen

Field	Req.	Meaning and rules	Example
Client	*	Search.	`Salim Hamad Said Al Balushi`
Property	*	Must belong to that client. Neither may be archived.	`Plot 102/8 — Al Khoud, Seeb`
Project code		Blank for automatic (`YY.P.NNN` planning, `YY.S.NNN` supervision). Unique.	(blank)
Name	*	Suggested as "{client} – {property}".	`Salim Hamad Said Al Balushi — Plot 102/8 — Al Khoud, Seeb`
Type	*	Planning, Supervision, or Planning and supervision. Decides the workstreams.	Planning and supervision
Start date		Planned start.	`01/12/2026`
Target end date		Cannot be before the start date. Or type a duration.	`01/12/2027` (or 12 Months)

Documents received		Tick Mulkiya (title deed), ID card, Agreement as they arrive.	Mulkiya, ID card
Description		Scope in words.	`G+1 villa, 5 bedrooms...`

6.1 Edit a project (needs project:edit)

Same fields as above except client, property and status, which can never be changed. If the project has a Supervision workstream there is also a **Supervision details** block: **Assigned site engineer** (`Yusuf Al Rashdi`), **Krookie** received (tick), **Approved drawings** received (tick, "if not done by our company"). A planning-only project that later needs supervision is upgraded from `/supervision/new` with "Use this project", never by editing Type.

6.2 Add the team

On the project page, Team card. Needs `project:manage_members`.

Field	Req.	Meaning	Example
Person	*	An active user. Cannot add the same person twice.	Fatima Al Harthy
Role on this project	*	What they do here. Their permissions still come from their own role.	Planning Team

Add `fatima.alharthy` (Planning), `huda.kindi` (Planning), `yusuf.rashdi` (Supervision). A project must always keep at least one member. Without membership a project-level user gets "not found".


6.3 Activate

On the Status card press **Activate**. Draft → Active. The other moves are Put on hold (Active → On hold), Activate again to resume, Mark complete and Close (stage 10).

> **After activate:** status **Active**. Workstreams are Not started until someone presses Start on each.

7. Planning /projects/[id]/planning

Needs `planning:create` / `planning:edit` (Planning Team, Project Manager). Three cards.

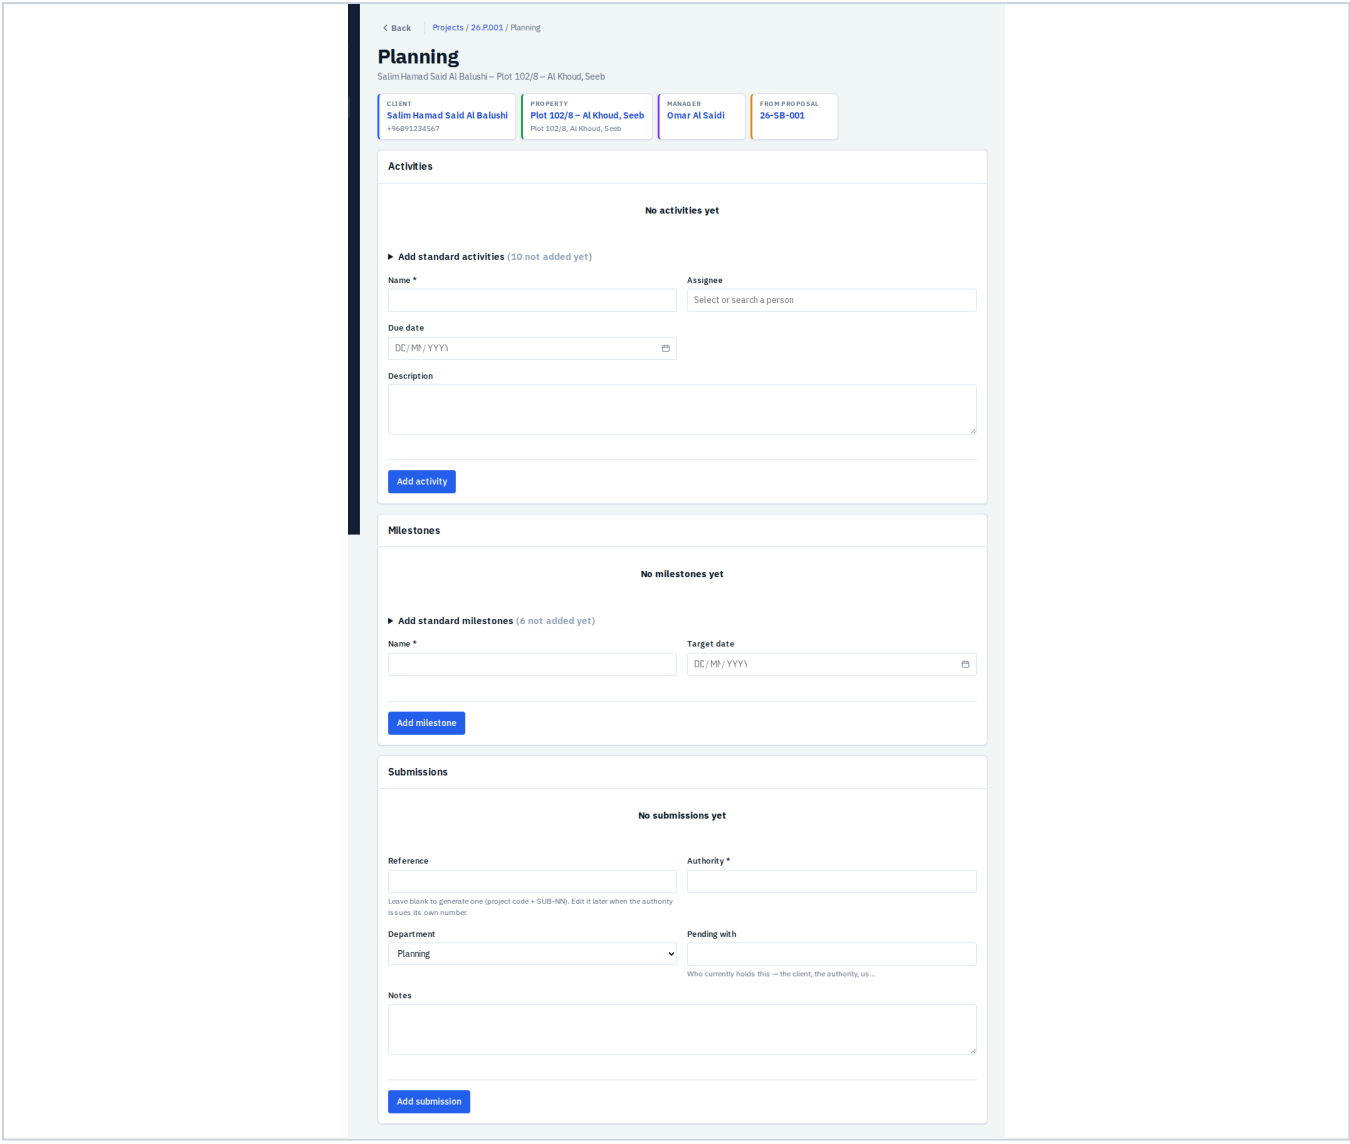

The Planning page: activities, milestones and submissions

7.1 Activities (tasks)

Tick "Add standard activities" for template names, or use the form (button **Add activity**).

Field	Req.	Meaning	Example
Name	*	The task. Suggestions come from templates and earlier names.	`Site survey`
Assignee		Who does it.	Fatima Al Harthy
Due date		Deadline.	`10/12/2026`
Description		Details.	`Topographic survey of the plot`

Use **Mark done** when finished. Archive hides a wrong entry.

7.2 Milestones (checkpoints)

Field	Req.	Meaning	Example

Name	*	The checkpoint.	`Concept approved`
Target date		Planned date.	`20/12/2026`

Press **Mark reached** when it happens; today's date is recorded.

7.3 Submissions to an authority

Field	Req.	Meaning and rules	Example
Reference		Blank for automatic (`{project code}-SUB-NN`). Edit it later when the authority issues its own number.	(blank) → `26.P.001-SUB-01`
Authority	*	Who we submit to.	`Muscat Municipality`
Department		Planning or Housing (default Planning).	Planning
Pending with		Who holds it right now: client, authority, us.	`Us`
Notes		Free text.	`Resubmission pack v1`

7.4 The submission page: status moves

Button	Who	Effect
Submit	planning:edit	Draft → Submitted.
Start review	planning:edit	Submitted → Under review.
Approve	planning:approve, **not the person who created it**	Under review → Approved. Needs a **Permit reference** (for example `MM/2027/0456`) unless one is already recorded.
Reject	planning:approve	Under review → Rejected (final).
Return for revision	planning:approve	Back to the team; press Submit again after fixing.
Withdraw	planning:edit	Draft or Submitted → Withdrawn (final).
Halt / Resume / Cancel	planning:edit	Pause, restart at the status before the pause, or cancel a halted submission.

Other cards on the page:

Card	Fields	Example
Request clarification	Press Request clarification while Under review. Later fill **Response** and press Record response. Status does not change.	`Authority asked for revised setback dimensions`
Reviews → Log review	Review date *, Reviewer, Response due, Comments. Later fill Response on the row.	`20/01/2027` , `Eng. Al Lawati` , `05/02/2027`
Meetings → Log meeting	Scheduled for (date and time), Attendees (names, comma-separated), Required (tick), Purpose. Later fill Outcome on the row.	`25/01/2027 10:00` , `Eng. Al Lawati, Fatima Al Harthy` , ticked, `Discuss setback`

Story: `fatima.alharthy` creates and submits; `huda.kindi` starts review and approves with permit `MM/2027/0456` . Status **Approved**.

Trap. If Fatima tries to approve her own submission: "You cannot approve a submission you created yourself. Ask another approver to do it."

When all submissions are decided, every milestone is reached and every activity is done, press **Start** then **Complete** on the Planning workstream (stage 10).

8. Supervision `/projects/[id]/supervision`

Needs `supervision:create` / `supervision:edit` (Supervision Team, Project Manager).

8.1 Supervision agreement

Field	Req.	Meaning and rules	Example
Type	*	Monthly or On call.	Monthly
Visits allowed	*	Whole number, at least 1. The dashboard warns when the quota nears.	`4`
Amount	*	Fee, 0 or more.	`300`
Start date	*	When it begins.	`01/03/2027`
End date		Optional.	`31/03/2027`
Notes		Free text.	`OMR per month`

Renew copies the terms and starts the day after the old end date; you may change visits, amount and dates. An agreement can be renewed only once.

8.2 Site visit, observations, instructions

Form	Fields	Example
Record site visit	Visit date *, Attendees (type names or add staff from the list), Notes	`10/03/2027`, `Yusuf Al Rashdi, Khalid Al Balushi`, `Slab reinforcement inspected`
Record observation (on the visit)	Description *, Category	`Column reinforcement spacing exceeds drawing`, `Structural`
Issue instruction (on the visit)	Directive *, Assignee, Due date. Press Mark actioned when done.	`Correct spacing before pour`, Yusuf Al Rashdi, `12/03/2027`

8.3 Issues

From an observation use "Raise issue", or create one from the project's Issues page (needs `issue:create`).

Field	Req.	Meaning	Example
Title	*	Short summary.	`Rebar spacing non-compliant`
Description		Details.	`Spacing 250 mm vs 150 mm on drawing S-02`
Workstream	*	Only when the project runs both: Planning or Supervision.	Supervision
Severity	*	Low, Medium, High, Critical.	High
Priority	*	Low, Medium, High.	High
Owner, Due date		Who fixes it and by when.	Yusuf Al Rashdi, `15/03/2027`

Moves: Start work → Mark resolved → Close (needs `issue:close`); Reopen from Resolved or Closed. While editing, Closure notes can record how it was fixed. Open issues block project completion (supervision) and close.

9. Drawings, documents, modifications

9.1 Drawings `/projects/[id]/drawings`

Step	Fields	Example
Register drawing (drawing:create)	Drawing number * (unique in the project), Title *	`A-101`, `Ground floor plan`
Upload revision (on the drawing)	Revision code * (unique per drawing), File, Notes	`P1`, PDF file, `Issued for approval`

Revision moves: Submit and Start review (drawing:create), then Approve, Reject or Return for revision (drawing:approve: Director, System Administrator). **The person who uploaded a revision cannot approve it**; someone else must. They may still reject or return their own. A file must be uploaded **with** the revision; it cannot be added later and a revision without one cannot be approved. A revision with no file that you do not want must be **Rejected** or **Returned for revision**: while it sits under review it blocks completing the supervision workstream. Approved revisions never change. To change a drawing, upload the next revision (`P2`).

9.2 Documents `/projects/[id]/documents`

Field	Req.	Meaning and rules	Example
Category	*	Pick "{category} – {label}" so it counts toward the checklist, or "Other..." for photos, reports and the like.	`Design`
Title	*	Up to 200 characters.	`Concept design pack`
Description		Free text.	`Rev A, client approved`
File	*	Up to 50 MB.	a PDF

The card at the top reads "Every required document has been uploaded" or "N required document(s) missing", with a tick or cross per category. Editing a document changes only its details; to replace the file upload a new document and archive the old one. Needs `document:create` / `edit` / `archive`.

9.3 Modifications (client change requests)

Field	Req.	Meaning	Example
Impact area	*	Architecture, Structural or MEP.	Architecture
Cost impact		Free text.	`+OMR 1,200`
Time impact		Free text.	`+1 week`
Drawing revision		If raised against one.	`A-101 P1`
Site visit observation		If raised from one.	(blank)
What the client is asking for	*	The change request in words.	`Enlarge majlis by 12 sqm`

Moves: Submit and Start review (planning:edit), then Approve, Reject or Return for revision (planning:approve). **The person who recorded a modification cannot approve it.** Pending modifications and unapproved drawings block completing the supervision workstream.

10. Complete and close a project

10.1 Complete each workstream

On the project page, Workstreams table: **Start** (Not started → In progress), then **Complete**. Complete is disabled until the list below it shows everything met.

Workstream	Must be true
Planning	No submission still in progress (draft, submitted, under review, returned or halted). Every milestone reached. Every activity done.
Supervision	No open supervision issue. No drawing revision awaiting a decision. No modification awaiting a decision.

10.2 Mark the project complete

Press **Mark complete** once every workstream is Completed. The "Before marking complete" list shows "N of M conditions met", with a *Go there* link for each gap. The actual end date is recorded.

> **Director override.** A Director or System Administrator may open **Complete anyway…**, type a **Reason for overriding** (5 to 500 characters, for example `Client took over remaining snagging directly`) and confirm. The reason and the unmet conditions are written to the audit trail.

10.3 Handover checklist, then Close

When the status is Completed the Handover card appears. Press **Mark done** beside each item. Ticks are one-way.

Item	Meaning
Final inspection done	Final site inspection completed.
Authority completion documents received	Completion certificate or equivalent.
Mandatory tests received	Test reports in hand.
As-built drawings received	Final as-built set.
Warranties received	Warranty documents.
Final report issued	Report delivered to the client.

Close also needs **no open issues** and **no missing required documents** (stage 2.5). When all are clear the **Close** button turns on. The project manager (project:close) confirms "Closed is final".

> **After close:** status **Closed**. Nothing in the project can be changed again: no new submissions, drawings, documents, issues or team changes.

> **No override for Close.** If it is disabled: "Close all issues, upload every required document and complete the handover checklist first."

11. Admin tools after go-live `/admin/data`

For System Administrators only (`admin:data`). Use only to remove records entered by mistake.

1. Pick a tab: Clients, Properties, Projects or Proposals. Search to find the record (archived ones are included) and press **View impact**.
2. The impact tree shows everything linked to it, all pre-selected. Untick what you want to keep.
3. **Archive selected** hides records (only for clients, contacts, properties, activities, milestones, documents).

4. **Hard delete selected** is permanent. A window asks you to type the root record's exact name, for example `Salim Hamad Said Al Balushi`, before the delete button turns on.

> Hard delete cannot be undone. Check the impact tree twice. Records that belong to a closed project are still removable here, so be certain.

12. Reference

12.1 Who can do what

Action	System Admin	Director	Project Manager	Planning	Supervision	Doc. Controller
Create client / property	Yes	No	Yes	No	No	No
Create / edit proposal	Yes	No	Yes	Yes	No	No
Convert proposal	Yes	No	Yes	No	No	No
Create project	Yes	No	Yes	No	No	No
Edit / close project (own projects)	Yes	No	Yes	No	No	No
Manage team	Yes	No	Yes	No	No	No
Planning work and submissions	Yes	View	Yes	Yes	View	View
Approve submission / modification	Yes	Yes	No	Yes	No	No
Approve drawing revision	Yes	Yes	No	No	No	No
Supervision work	Yes	View	Yes	View	Yes	View
Issues (raise, edit, close)	Yes	View	Yes	View	Yes	View
Documents (upload, edit)	Yes	View	Yes	View	View	Yes
Archive document	Yes	No	No	No	No	Yes
Override completion gate	Yes	Yes	No	No	No	No
Override duplicate warning	Yes	Yes	No	No	No	No
Users, roles, data management	Yes	View users	View users	No	No	No

Project-level roles see only projects they are members of. Submissions, drawing revisions and modifications all block self-approval: whoever created the record cannot approve it.

12.2 Statuses at a glance

Item	Path
Proposal	New → Concept → Client revision → Approved → Won → **Converted**. Side exits: On hold, Lost.
Project	Draft → Active ↔ On hold; Active → Completed → **Closed**.
Workstream	Not started → In progress ↔ On hold; In progress → Completed.
Submission, drawing revision, modification	Draft → Submitted → Under review → Approved / Rejected / Returned for revision (→ Submitted again). Submissions can also be Withdrawn, Halted or Cancelled.
Issue	Open → In progress → Resolved → Closed; Reopen possible.

12.3 "Why can't I do this?"

You see	Cause and fix

Button missing	Your role does not allow it, or the status does not permit it, or you are not on the project team.
"Attach a property to this proposal before converting it." / "Add the Krookie survey reference..." / "Record the requirements..."	Fill the item in the "Ready to convert" card.
"A record with the same official identity already exists."	Open the existing client or property. Only a Director or System Administrator can override, with a reason.
"Another property already uses this survey reference (Land ID)."	Survey reference is unique with no override. Check for a duplicate property.
"That property does not belong to the named client."	Pick a property owned by that client.
"A permit reference is required to approve this submission."	Type the Permit reference in the Approve card.
"You cannot approve a submission (or drawing revision, or modification) you created yourself."	Ask another approver.
Drawing: "This revision has no drawing file..."	Upload a new revision with the file, then approve that one.
"This cannot be completed yet — some conditions are not met."	Follow the readiness list's *Go there* links, or ask a Director for an override.
"The handover checklist must be complete before this project can be closed."	Tick all six items, close issues, upload missing documents.
"This project is closed."	Closed projects are read-only.
"That change is not allowed from the current status."	The page is out of date. Reload and use the buttons shown.
"This cannot be archived because other records depend on it."	Archive or move the dependent properties or projects first.
"You do not have permission to do that."	Ask an administrator to check your role.
"Something went wrong. Quote the requestId to support."	Note the request id on screen and report it.

12.4 Notes

- On a proposal's Edit screen, Survey reference and Requirements are not marked required (they are on Create), but both must be filled before the proposal can convert.
- The land-use and projection lists on the property form are provisional and may change once confirmed with the client.
- Automatic codes in this guide (`CL-2026-001`, `26-SB-001`, `26.P.001`) show the pattern; your actual numbers continue from your own sequence.
- This guide was checked by running the whole story (setup, client, property, proposal, convert, team, planning and permit, supervision, drawing, documents, modification, completion, close) against a test copy of the system on 26 October 2026. Codes and statuses shown are what it produced.
- Everything you save, and every refused action, is recorded in an append-only audit trail.